


LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
CAPACITANCE	1000pF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	85°C --VDC MAX. 125°C 500VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
100	15
300	25
1 GHz	35
10 GHz	40

04

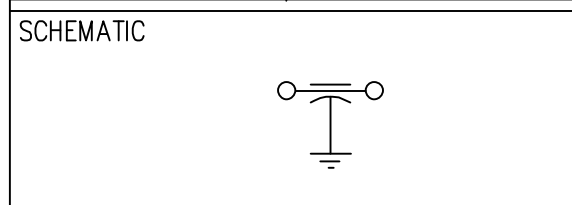

MARKING:

PART: NONE
 BAG:
 54803004X5V102P
 LOT # _____
 DATE CODE _____
 QTY./BAG (200 MAX.)

- NOTES:
1. SUGGESTED MOUNTING HOLE = ϕ .191[4.86]
 2. SOLDER PREFORM SUPPLIED AS HARDWARE
 3. PRE FLATTEN/NOTCH DIMENSIONS
TOP: .323±.010

CN 46683-ENG	04	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA
	03		Fractions ± 1/64		
	02		Dec. .xx±		
	01		Dec. .xxx±.015		
	00		Angles ±0° 30'		
CHANGE NOTICE			CODE IDENT. NO. QLSP2	Dwn. KAUFFMAN	Description STANDOFF CERAMIC FILTER
				Date 2-20-09	
				Apvd.	
				Scale NONE	54803004X5V102P