


**KEMET Part Number: T419H106K035BC**  
(CWR19MC106KBHZ)

Capacitor, Tantalum, 10 uF, 7238, +/-10% Tol, -55/+125C, 35 VDC (85C), Failure Rate=B (0.1%/1000 Hrs)

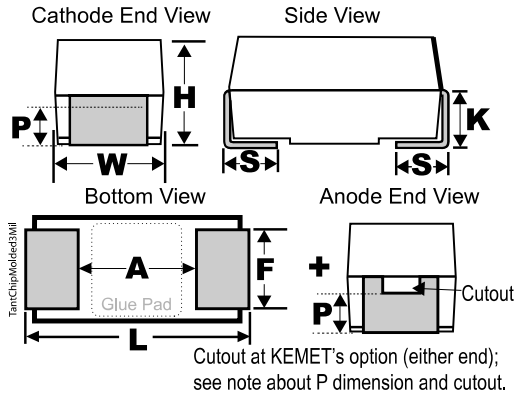

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.24	+/-0.38
W	3.81	+/-0.38
H	2.79	+/-0.38
K	1.52	MIN
F	3.68	+0.13/-0.51
S	1.27	+0.025/-0.13
P	0.76	MIN
A	4.7	NOM

**Notes:**

-Note: When Option C Is Selected For Lead Material, Add An Additional 0.38mm To The Tolerances For "L", "W", "H", "K", "F" And "S"

-P And R Dimensions Represents The Minimum Solderable Area Of The Termination Surface Entirely Below Cutout (If One Is Present)

General Information	
Supplier:	KEMET
Application:	MIL-PRF-55365/11
Sub Application:	(ExtendedRange)
Part Type Description:	SMD, MnO <sub>2</sub> , Molded, Military Equivalent
Construction:	Standard Chip-MnO <sub>2</sub>
Body Type:	SMD Chip
Termination:	Hot Solder Dipped
Footprint:	7238
Weight:	349.01 mg
Approvals:	MIL-PRF-55365/11, CWR19 Style
RoHS:	No

Specifications	
Capacitance:	10 uF
Tolerance:	+/-10%
Voltage:	35 VDC (85C)
Voltage:	23.45 VDC (125C)
Temperature Range:	-55/+125C
Testing:	Standard Testing Only
Resistance/ESR:	0.9 Ohms (100kHz)
Failure Rate:	B (0.1%/1000 Hrs)
Leakage Current:	4 uA
Dissipation Factor:	8%

Packaging Specifications	
Package Kind:	T&R
Package Size:	7 in/180 mm
Package Quantity:	500